

2-Channel Up/Down Counter 24 V DC, 500 Hz

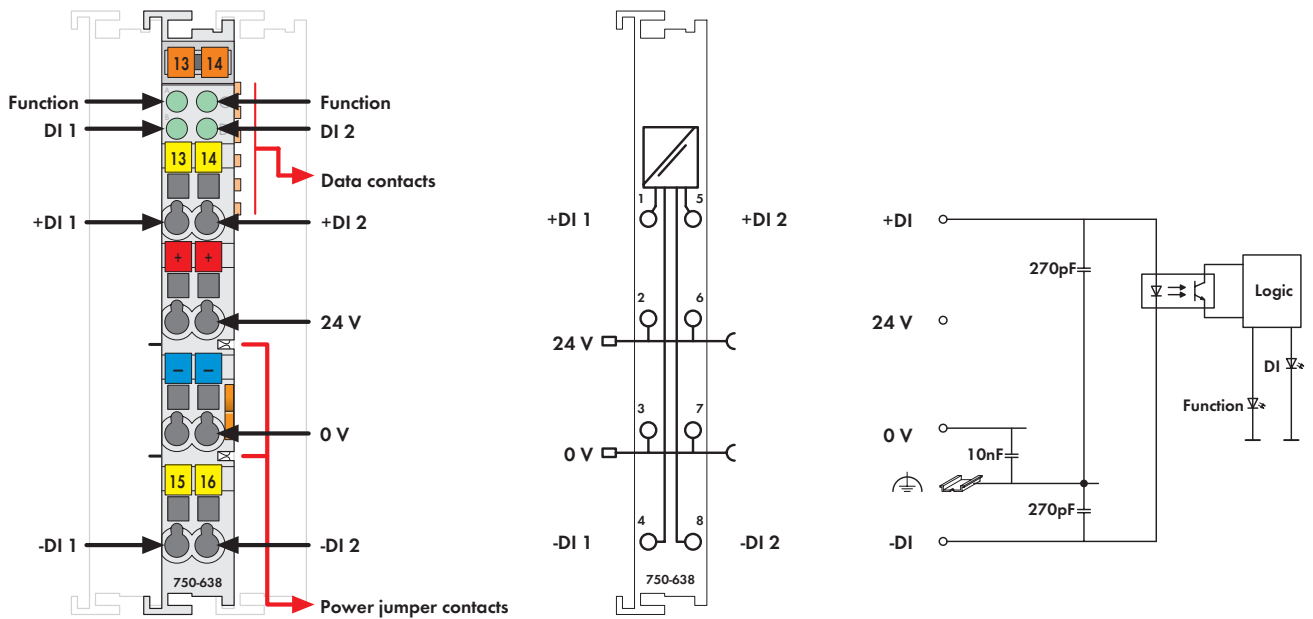






Fig. 750 Series/Technical data see page 24/Delivered without miniature WSB markers  
750/753 Series marking see pages 12 ... 13 / 14 ... 15

The up/down counter has two counters that allow independent counting of 24VDC binary pulses. The data is then transmitted to the control via the fieldbus.

The counters can be set or reset with the control bytes. A counter lock-out is also possible.

The control bytes also determine the direction of counting.

Description	Item No.	Pack. Unit
2-Channel Up/Down Counter, 500 Hz	750-638	1
2-Channel Up/Down Counter, 500 Hz/T (Operating temperature -20 °C ... +60 °C)	750-638/025-000	
2-Channel Up / Down Counter, 500 Hz (without connector)	753-638	1
<b>Accessories</b>		
 753 Series Connectors	753-110	25
 Coding elements	753-150	100
<b>Miniature WSB Quick marking system</b>		
 plain	248-501	5
 with marking	see pages 304 ... 305	
<b>Approvals</b>		
750 and 753 Series		
Conformity marking	CE	
UL 508		
ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4	
750 Series		
(Approvals for product variations upon request)		
EN 60079-15	I M2 / II 3 GD Ex nA IIC T4	
	BR-Ex nA II T4	

Technical Data	
No. of counters	2
Current consumption typ. (internal)	10 mA
Voltage via power jumper contacts	24 V DC (-1.5 % ... +20 %)
Signal voltage (0)	-3 V ... +5 V DC (acc. to EN 61131 type 1)
Signal voltage (1)	15 V ... 30 V DC (acc. to EN 61131 type 1)
Common mode voltage (max.)	500 V DC
Minimum pulse width (0, 1)	1 ms
Input filter	0.2 ms
Sensor connection	differential
Switching frequency (max.)	500 Hz
Counter depth	16 bits
Isolation	500 V system/supply
Current consumption typ. (field side)	8 mA
Internal bit width	2 x 16 bits data
	2 x 8 bits control/status (optional)
Wire connection	CAGE CLAMP®
Cross sections	0.08 mm² ... 2.5 mm² / AWG 28 ... 14
Stripped lengths, 750/753 Series	8 ... 9 mm / 0.33 in
	9 ... 10 mm / 0.37 in
Width	12 mm
Weight	58 g
EMC CE-Immunity to interference	acc. to EN 61000-6-2 (2005)
EMC CE-Emission of interference	acc. to EN 61000-6-4 (2007)