

WAGO → I/O → SYSTEM 755

IP 67 I/O Module



Technical Information

755-122

DeviceNet Slave 8DO 24 V DC 2 A

Version 1.0.0

Copyright © 2000 by WAGO Kontakttechnik GmbH
All rights reserved.

WAGO Kontakttechnik GmbH

Hansastraße 27
D-32423 Minden

Phone: +49 (0) 571/8 87 – 0
Fax: +49 (0) 571/8 87 – 1 69
E-Mail: info@wago.com
Web: <http://www.wago.com>

Technical Support

Phone: +49 (0) 571/8 87 – 5 55
Fax: +49 (0) 571/8 87 – 4 30
E-Mail: support@wago.com

Every conceivable measure has been taken to ensure the correctness and completeness of this documentation. However, as errors can never be fully excluded we would appreciate any information or ideas at any time.

We wish to point out that the software and hardware terms as well as the trademarks of companies used and/or mentioned in the present manual are generally trademark or patent protected.

TABLE OF CONTENTS

| | | |
|----------|--|-----------|
| 1 | Important comments..... | 4 |
| 1.1 | Legal principles..... | 4 |
| 1.1.1 | Copyright..... | 4 |
| 1.1.2 | Personnel qualification..... | 4 |
| 1.1.3 | Intended use..... | 4 |
| 1.2 | Representation of numeric systems..... | 4 |
| 2 | Device description..... | 5 |
| 2.1 | Features..... | 5 |
| 2.2 | Mounting..... | 5 |
| 2.3 | Addressing..... | 6 |
| 2.4 | Diagnostic indication..... | 6 |
| 2.5 | Pin assignment..... | 7 |
| 2.5.1 | DeviceNet In..... | 7 |
| 2.5.2 | DeviceNet Out..... | 7 |
| 2.5.3 | Actuator..... | 7 |
| 2.5.4 | Actuator supply..... | 7 |
| 2.6 | Basic wiring diagram of an output..... | 8 |
| 3 | Technical data..... | 9 |
| 4 | DeviceNet..... | 11 |
| 4.1 | Object model 755-122..... | 11 |
| 4.1.1 | Class 0x01, Identity Object..... | 11 |
| 4.1.2 | Class 0x02, Message Router Object..... | 11 |
| 4.1.3 | Class 0x03, DeviceNet Object..... | 11 |
| 4.1.4 | Class 0x04, Assembly Object..... | 12 |
| 4.1.5 | Class 0x05, Connection Object..... | 12 |
| 4.1.6 | Class 0x09, Digital Output Points..... | 13 |
| 4.1.7 | Class 0x1E, Digital Output Group..... | 13 |

1 Important comments

To ensure fast installation and start-up of the units described in this manual, we strongly recommend that the following information and explanation is carefully read and adhered to.

1.1 Legal principles

1.1.1 Copyright

This manual is copyrighted, together with all figures and illustrations contained therein. Any use of this manual which infringes the copyright provisions stipulated herein, is not permitted. Reproduction, translation and electronic and photo-technical archiving and amendments require the written consent of WAGO Kontakttechnik GmbH. Non-observance will entail the right of claims for damages.

1.1.2 Personnel qualification

The use of the product detailed in this manual is exclusively geared to specialists having qualifications in PLC programming, electrical specialists or persons instructed by electrical specialists who are also familiar with the valid standards. WAGO Kontakttechnik GmbH declines all liability resulting from improper action and damage to WAGO products and third party products due to non-observance of the information contained in this manual.

1.1.3 Intended use

For each individual application, the components supplied are to work with a dedicated hardware and software configuration. Modifications are only admitted within the framework of the possibilities documented in the manuals. All other changes to the hardware and/or software and the non-conforming use of the components entail the exclusion of liability on part of WAGO Kontakttechnik GmbH.

Please direct any requirements pertaining to a modified and/or new hardware or software configuration directly to WAGO Kontakttechnik GmbH.

1.2 Representation of numeric systems

| Numeric system | Example | Remark |
|----------------|----------------------|--|
| Decimal | 100 | normal notation |
| Hexadecimal | 0x64 | C-notation |
| Binary | '100' '0110.0100' | with inverted comma, 4 bits (Nibble) seperated with a point |

2 Device description

2.1 Features

- DeviceNet Group 2 only Server
- 8 digital outputs for standard actors
- Capable of 125-, 250-, 500- kBaud
- Address preset 63
- Protection IP 67

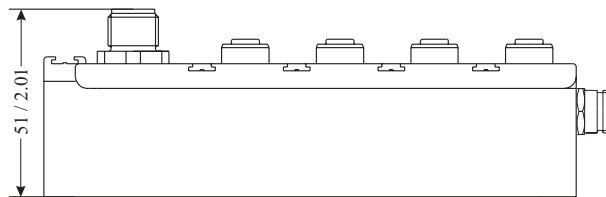
2.2 Mounting



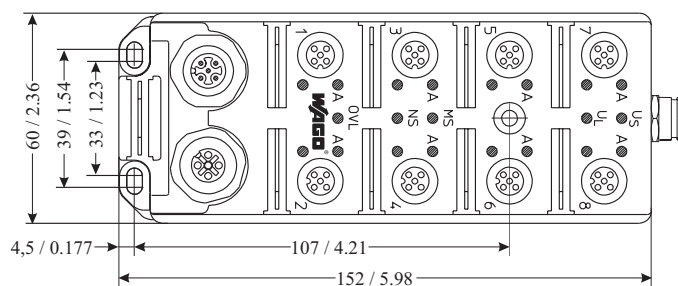
Attention

Depending on the kind of addressing chosen by you you have to assign addresses either before or after the mounting. (see addressing)

- Mount the module on a plain surface by means of 3 M4x35 screws.



Dimensions (mm / in)



- Ground connection via fastening screws at the bottom.
- Bus / supply connection via M12 coupling/connector (5-pin).



Attention, risk of destruction

Never connect power supply (DC 24 V) to data lines (CAN_H → Pin4, CAN_L → Pin5)

- Actuator supply via 7/8“ connector (3-pin). This supply is provided with reverse battery protection (anti-parallel diode). The reverse battery protection only works when the preceding excess current protection (10 A mT) is switched off in case of a short-circuit after 10 to 100 ms at the latest.
- Actuator connection via M12 coupling (5-pin).

2.3 Addressing

Addressing from DeviceNet master (scanner):

- via DeviceNet manager or RS Network made by Allen Bradley
- via the suitable software of the manufacturer (configurator, commissioningtool etc.)

a) addressing before the mounting

Directly connect the module to the scanner (CAN_H, CAN_L) and power supply unit. Assign the address via the above mentioned software and record it on the module (nameplate).

b) addressing after the mounting


Fasten modules, connect actuators, if applicable. Connect bus cable (CAN_H, CAN_L from scanner + supply from power supply unit) to the first module, assign addresses. Repeat action, assign addresses after each module integrated into the line (bus cable connected).

2.4 Diagnostic indication


| LED | Indication | Requirement |
|------------------------|-------------------|---|
| 1 ... 8A | yellow | channel active |
| 1 ... 8 | red | actuator short circuit |
| U _S | green | actuator supply active |
| U _L | green | module supply active |
| MS (module status) | 1) green | module ready |
| | 2) red blinking | none-critical error |
| | 3) red | critical error |
| NS (network status) | 1) green | online, connected with master |
| | 2) green blinking | online, no connection with master |
| | 3) red blinking | time-out status for the last I/O-connection |
| | 4) red | BUS-Off status, multiple node address |

2.5 Pin assignment


2.5.1 DeviceNet In

| DeviceNet In | Connector | Pin | Function | |
|---|-----------|-----------|----------|-------|
|  | M12 | DeviceNet | 1 | Drain |
| | | | 2 | V + |
| | | | 3 | V - |
| | | | 4 | CAN_H |
| | | | 5 | CAN_L |


2.5.2 DeviceNet Out

| DeviceNet Out | Connector | Pin | Function | |
|--|-----------|-----------|----------|-------|
|  | M12 | DeviceNet | 1 | Drain |
| | | | 2 | V + |
| | | | 3 | V - |
| | | | 4 | CAN_H |
| | | | 5 | CAN_L |

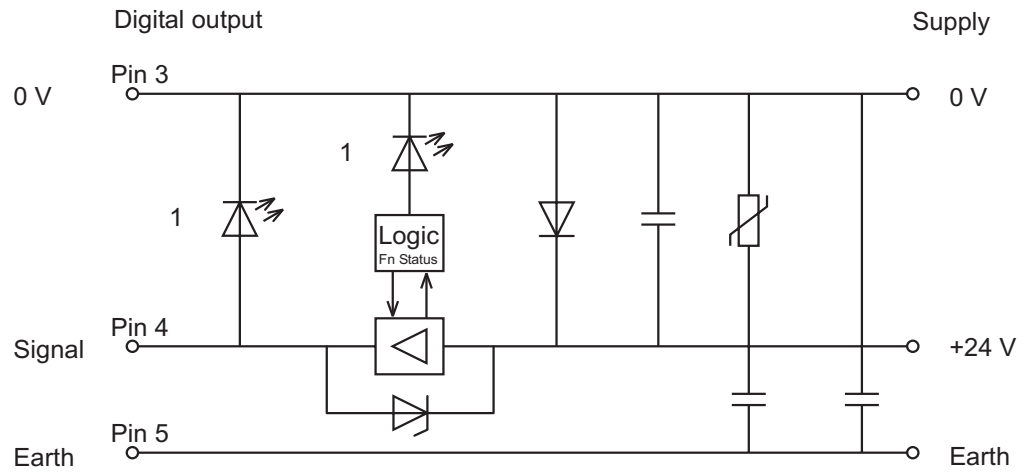
2.5.3 Actuator

| Actuator connection | Connector | Pin | Function | |
|---|-----------|--------|----------|--------|
|  | M12 | Output | 1 | n.c. |
| | | | 2 | n.c. |
| | | | 3 | 0 V |
| | | | 4 | Signal |
| | | | 5 | Earth |

2.5.4 Actuator supply

| Actuator supply | Connector | Pin | Function | |
|---|-----------|--------|----------|----------|
|  | 7/8" | Supply | 1 | Earth |
| | | | 2 | DC +24 V |
| | | | 3 | 0 V |

2.6 Basic wiring diagram of an output



3 Technical data

| General data | |
|-----------------------|-----------------------------|
| Degree of protection | IEC IP 67 (NEMA Type 4-6 P) |
| Operating temperature | 0 °C ... +60 °C |
| Storage temperature | 0 °C ... +60 °C |
| Weight | 550 g |

| DeviceNet system data | |
|--|---|
| Interface | ISO 11898 |
| Transmission medium | certified DeviceNet cable twisted two-wire circuit with power supply |
| Baud rate programable via DeviceNet-Master | 0 = 125kBaud / 1 = 250kBaud / 2 = 500kBaud |
| MAC ID programable via DeviceNet-Master | 0 ... 63 |
| DeviceNet profile | General Purpose Discret I/O Device Type: 0x07 |
| Total length | max. 500 m trunk cable(depends on Baudrate) max. 6 m drop cable |
| Topology | Line structure with drop cables |
| Addressing | via master |
| Communication | Explicit Message Connection Polled I/O Message Connection Bit Strobed I/O Message Connection Change of State / Cyclic Message Connection |
| User hierachy | Multi-Master |
| Cycle time | depends on number of devices and baud rate |
| Terminating resistor | yes |

| Power supply - electronics | |
|---------------------------------------|------------------|
| Nominal voltage | DC 24 V |
| Voltage range | DC 15 V ... 30 V |
| Current consumption | max. 100 mA |
| Reverse voltage protection | Transistor |
| Operating indicator (U _L) | LED green |

| Outputs | |
|---|--|
| Number of digital channels | 8 |
| Nominal output current | 2 A per channel |
| Current consumption per module | max. 12 A |
| Current output „High“ „Low“ | max. 2.4 A max. 100 µA |
| Turn-on current (t < 2s) | 3 A |
| Short circuit protection | < 15 ms |
| Signal voltage of outputs Signal 0 Signal 1 | DC 12 V ... 30 V max. 3 V < U _S – 0.5 V |
| Turn-on time | max. 1 ms |
| Turn-off time | max. 1 ms |
| Type of channel | PNP, positive switched, short circuit proof |
| Channel status indicator | LED yellow, illuminated when ON |
| Input connector type | Female M12-Connector (5-pole) |

| Power supply - actuators | |
|------------------------------------|---|
| Nominal voltage U _S | DC 24 V |
| Voltage range | DC 19 V ... 30 V |
| Current consumption without load | max. 30 mA |
| Electrical insulation | exist |
| Reverse voltage protection | Anti parallel diode (unregulated power supply unit required, 10 A medium time-lag fuse) |
| Output protection | Varistor |
| Power supply status U _S | LED green |

4 DeviceNet

4.1 Object model 755-122

4.1.1 Class 0x01, Identity Object

| Instance 0 | |
|---------------------|--|
| no Class Attributes | |

| Instance 1 | | | |
|--------------|-------------|---------------|-----------------------|
| Attribute ID | Access Rule | Name | Default Value |
| 1 | Get | Vendor ID | 40 (0x28) |
| 2 | Get | Device Type | 07 (0x07) |
| 3 | Get | Product Code | 121 (0x79) |
| 4 | Get | Revision | current version |
| 5 | Get | Status | |
| 6 | Get | Serial Number | |
| 7 | Get | Product name | “755-122, 8DO 24 VDC“ |

4.1.2 Class 0x02, Message Router Object

| Instance 0 | |
|---------------------|--|
| no Class Attributes | |

| Instance 1 | |
|------------------------|--|
| no Instance Attributes | |

4.1.3 Class 0x03, DeviceNet Object

| Instance 0 | | | |
|--------------|-------------|----------|---------------|
| Attribute ID | Access Rule | Name | Default Value |
| 1 | Get | Revision | 02 |

| Instance 1 | | | |
|--------------|-------------|------------------------|---------------|
| Attribute ID | Access Rule | Name | Default Value |
| 1 | Get/Set | MAC ID | 63 |
| 2 | Get/Set | Baud Rate | 0 = 125 kBaud |
| 3 | Get | BOI | |
| 4 | Get | Bus-Off Counter | |
| 5 | Get | Allocation Information | |

4.1.4 Class 0x04, Assembly Object

| Instance 0 | | | |
|---------------------|--|--|--|
| no Class Attributes | | | |

| Instance 34 | | | |
|--------------|-------------|------|---------------|
| Attribute ID | Access Rule | Name | Default Value |
| 3 | Set | Data | |

| I/O Assembly Data Attribute Format | | | | | | | | |
|------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|
| Byte | .7 | .6 | .5 | .4 | .3 | .2 | .1 | .0 |
| 0 | Output 8 | Output 7 | Output 6 | Output 5 | Output 4 | Output 3 | Output 2 | Output 1 |

| Instance 100 | | | |
|--------------|-------------|------|---------------|
| Attribute ID | Access Rule | Name | Default Value |
| 3 | Get | Data | |

| I/O Assembly Data Attribute Format | | | | | | | | |
|------------------------------------|------|-----------------|------|------|------|------|------|------|
| Byte | .7 | .6 | .5 | .4 | .3 | .2 | .1 | .0 |
| 0 | res. | actuator status | res. | res. | res. | res. | res. | res. |

4.1.5 Class 0x05, Connection Object

| Instance 0 | |
|---------------------|--|
| no Class Attributes | |

| Description of the Instance IDs | |
|---------------------------------|---|
| Instance ID | Description |
| 1 | Explicit Message Connection |
| 2 | Polled I/O Message Connection |
| 3 | Bit-Strobed I/O Message Connection |
| 4 | Change of State / Cyclic I/O Message Connection |

| Instance Attributes | | |
|---------------------|-------------|------------------------------|
| Attribute ID | Access Rule | Name |
| 1 | Get | state |
| 2 | Get | instance_type |
| 3 | Get | transportclass_trigger |
| 4 | Get | produced_connection_id |
| 5 | Get | consumed_connection_id |
| 6 | Get | initial_comm_characteristics |
| 7 | Get | produced_connection_size |
| 8 | Get | consumed_connection_size |
| 9 | Get / Set | expected_packed_rate |

| Instance Attributes | | |
|---------------------|-------------|---------------------------------|
| Attribute ID | Access Rule | Name |
| 12 | Get | watchdog_timeout action |
| 13 | Get | produced_connection_path_length |
| 14 | Get | produced_connection_path |
| 15 | Get | consumed_connection_path_length |
| 16 | Get | consumed_connection_path |
| 17 | Get | production_inhibit time |

4.1.6 Class 0x09, Digital Output Points

| Instance 0 |
|---------------------|
| no Class Attributes |

| Description of the Instance IDs | |
|---------------------------------|-------------|
| Instance ID | Description |
| 1 | Output 1 |
| 2 | Output 2 |
| 3 | Output 3 |
| 4 | Output 4 |
| 5 | Output 5 |
| 6 | Output 6 |
| 7 | Output 7 |
| 8 | Output 8 |

| Instance Attributes | | |
|---------------------|-------------|-------------|
| Attribute ID | Access Rule | Name |
| 3 | Get / Set | value |
| 5 | Get / Set | fault state |
| 6 | Get / Set | fault value |
| 7 | Get / Set | idle state |
| 9 | Get / Set | idle value |

4.1.7 Class 0x1E, Digital Output Group

| Instance 0 |
|---------------------|
| no Class Attributes |

| Instance 1 | | | |
|--------------|-------------|---------|---------------------|
| Attribute ID | Access Rule | Name | Default Value |
| 5 | Get | status | |
| 6 | Get / Set | command | 0 = Idle 1 = Run |



WAGO Kontakttechnik GmbH
Postfach 2880 • D-32385 Minden
Hansastraße 27 • D-32423 Minden
Phone: +49 (0) 5 71/8 87 – 0
Fax: +49 (0) 5 71/8 87 – 1 69
E-Mail: info@wago.com

Internet: <http://www.wago.com>
