EPSITRON - RS-232 Communication Cable

Similiar to picture

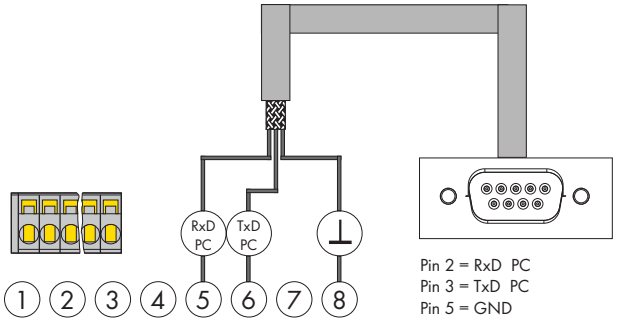

The 787-890 Communication Cable is used for configuration and visualization via PC or controller.
It is suitable for all 787-8xx Series devices equipped with an RS-232 serial interface.
PC software for 787 Series devices can be downloaded at: www.wago.com/epsitron
Function blocks for communication with WAGO-I/O-SYSTEM 750 are also available.

NOTE:
The 787-890 Communication Cable is not electrically isolated.

Description	Item No.	Pack. Unit
RS-232 communication cable	**787-890**	1

Technical Data	
Type of signal	RS-232
Ports	1 x 8-pole 733-108 Female Connector with strain relief (787-8xx Module side), 1x 9-pole SUB-D female connector (PC/controller side)
Isolation	No
Cross sections	3 x 0.34 mm² (AWG 22), shielded
Ambient operating temperature	-10°C ... +70°C
Degree of protection	IP20
Length	1.8 m