


Analog Signal Conditioning Module in DIN-Rail-mountable Enclosure

1/1

Input signal 4-20 mA

Data sheet

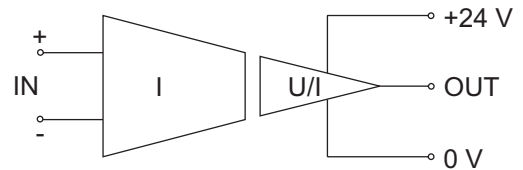

Description	Item-No.	Pack.-unit pcs																																								
Measuring output ± 10 V	787-363	1																																								
<ul style="list-style-type: none"> Analog signal conditioning module for signal transformation, amplification and transmission with electrical isolation of input and output of standard signals. Supply voltage at output only. Module in DIN-rail mountable enclosure. Multi connection system. (WAGO series 734) 																																										
<p>Technical Data</p> <p>Measuring input:</p> <table border="1"> <tr><td>Input signal</td><td>4-20 mA</td></tr> <tr><td>Max. input current</td><td>22 mA</td></tr> <tr><td>Input resistance</td><td>$\leq 50 \Omega$</td></tr> <tr><td>Max. voltage drop at input</td><td>≤ 4.5 V</td></tr> </table> <p>Measuring output:</p> <table border="1"> <tr><td>Output signal</td><td>± 10 V</td></tr> <tr><td>Working resistance</td><td>≥ 2 kΩ</td></tr> </table> <p>Transmission characteristics:</p> <table border="1"> <tr><td>Transmission error (measuring range)</td><td>≤ 0.1 %</td></tr> <tr><td>Offset error (measuring range)</td><td>≤ 0.1 %</td></tr> <tr><td>Temperature coefficient (full scale)</td><td>≤ 0.02 % / K</td></tr> <tr><td>Critical frequency (Sinus)</td><td>1 kHz</td></tr> <tr><td>Isolation voltage input/output</td><td>4 kV , 50 Hz , 1 min</td></tr> </table> <p>General data:</p> <table border="1"> <tr><td>Supply voltage RR ≤ 6 % input/output</td><td>DC 20-30 V</td></tr> <tr><td>Current consumption input/output</td><td>45 mA</td></tr> <tr><td>Nominal voltage acc. to VDE 0110/ 1.89</td><td>250 V / 4 kV / 3</td></tr> <tr><td>Ambient operating temperature</td><td>0 °C...+55 °C</td></tr> <tr><td>Storage temperature</td><td>-40 °C...+80 °C</td></tr> <tr><td>Dimensions (WxHxD)</td><td>(22,5x105* x74)mm (0.89x4.13* x2.91)in * from upper edge of DIN 35 rail</td></tr> <tr><td>Wire connection</td><td>Plugg. connector with CAGE CLAMP® (WAGO series 734) 0,08-1,5 mm² / AWG 28-16</td></tr> <tr><td>Stripped length</td><td>7 mm / 0.28 in</td></tr> <tr><td>EMC-test IEC 801-2/4/5</td><td>Grade B met acc.to EN50082 P.2 (3.94)</td></tr> </table>			Input signal	4-20 mA	Max. input current	22 mA	Input resistance	$\leq 50 \Omega$	Max. voltage drop at input	≤ 4.5 V	Output signal	± 10 V	Working resistance	≥ 2 k Ω	Transmission error (measuring range)	≤ 0.1 %	Offset error (measuring range)	≤ 0.1 %	Temperature coefficient (full scale)	≤ 0.02 % / K	Critical frequency (Sinus)	1 kHz	Isolation voltage input/output	4 kV , 50 Hz , 1 min	Supply voltage RR ≤ 6 % input/output	DC 20-30 V	Current consumption input/output	45 mA	Nominal voltage acc. to VDE 0110/ 1.89	250 V / 4 kV / 3	Ambient operating temperature	0 °C...+55 °C	Storage temperature	-40 °C...+80 °C	Dimensions (WxHxD)	(22,5x105* x74)mm (0.89x4.13* x2.91)in * from upper edge of DIN 35 rail	Wire connection	Plugg. connector with CAGE CLAMP® (WAGO series 734) 0,08-1,5 mm ² / AWG 28-16	Stripped length	7 mm / 0.28 in	EMC-test IEC 801-2/4/5	Grade B met acc.to EN50082 P.2 (3.94)
Input signal	4-20 mA																																									
Max. input current	22 mA																																									
Input resistance	$\leq 50 \Omega$																																									
Max. voltage drop at input	≤ 4.5 V																																									
Output signal	± 10 V																																									
Working resistance	≥ 2 k Ω																																									
Transmission error (measuring range)	≤ 0.1 %																																									
Offset error (measuring range)	≤ 0.1 %																																									
Temperature coefficient (full scale)	≤ 0.02 % / K																																									
Critical frequency (Sinus)	1 kHz																																									
Isolation voltage input/output	4 kV , 50 Hz , 1 min																																									
Supply voltage RR ≤ 6 % input/output	DC 20-30 V																																									
Current consumption input/output	45 mA																																									
Nominal voltage acc. to VDE 0110/ 1.89	250 V / 4 kV / 3																																									
Ambient operating temperature	0 °C...+55 °C																																									
Storage temperature	-40 °C...+80 °C																																									
Dimensions (WxHxD)	(22,5x105* x74)mm (0.89x4.13* x2.91)in * from upper edge of DIN 35 rail																																									
Wire connection	Plugg. connector with CAGE CLAMP® (WAGO series 734) 0,08-1,5 mm ² / AWG 28-16																																									
Stripped length	7 mm / 0.28 in																																									
EMC-test IEC 801-2/4/5	Grade B met acc.to EN50082 P.2 (3.94)																																									