JUMPFLEX® Relay Socket with Solid State Relay

	Solid state relay **Input: 230 V AC/DC** **Output: 24 V ... 240 V AC / 1 A**	





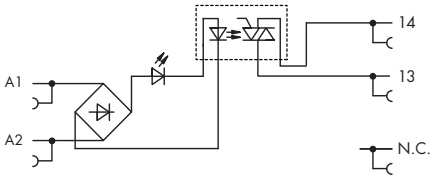

Description	**Item No.**	**Pack. Unit**	
***JUMPFLEX*® relay socket with solid state relay, for DIN 35 rail**	**857-718**	1	

Technical Data	Accessories see pages 62 ... 63	
Control circuit:		
Nominal input voltage (V_N)	230 V AC/DC	
Input voltage range	U_N -15 % ... +10 %	
Nominal input current (I_N)	3.1 mA	
Load circuit:		
Switching voltage	24 V ... 240 V AC	
Peak reverse voltage	600 V	
Max. switching current	1 A AC	
Forward voltage at max. switching current	< 1 V AC	
Ambient operating temperature	-20 °C ... +60 °C	
Storage temperature	-40 °C ... +70 °C	
Dielectric strength control/switching circuit	2.5 kV	
Dimensions (mm) W x H x L	6 x 81 x 94	
	Height from upper-edge of DIN 35 rail	
Wire connection	CAGE CLAMP®S	
Cross sections	solid: 0.08 mm² ... 2.5 mm² / AWG 28 ... 12	
	fine-stranded: 0.34 mm² ... 2.5 mm² / AWG 22 ... 12	
Stripped lengths	9 ... 10 mm / 0.37 in	