


# Power supply Cable

for WAGO  $\equiv$  SPEEDWAY 767

1/2

Data Sheet

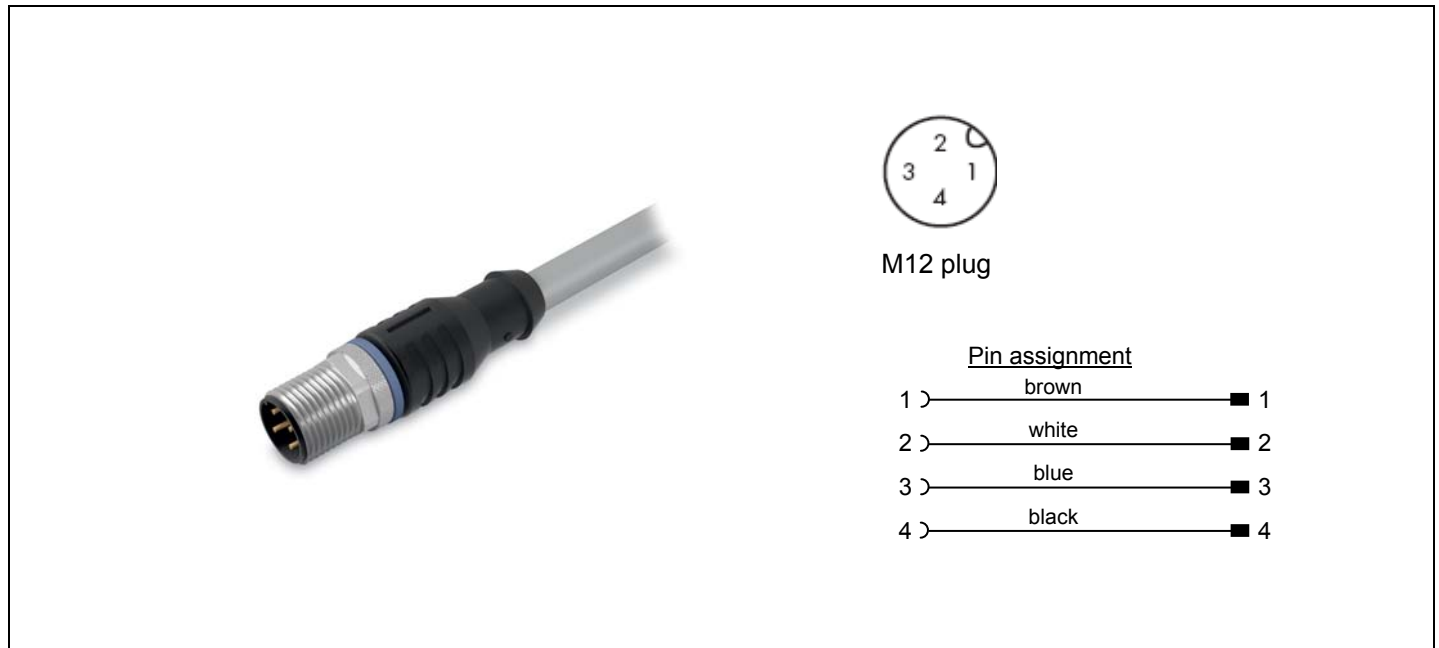

Description	Item no.	Pack. unit pcs																																																
Power supply cable, with one end of cable fitted, A coded																																																		
M12 plug, straight, one free cable end, 2.0 m	756-3103/0040-0020	1																																																
M12 plug, straight, one free cable end, 5.0 m	756-3103/0040-0050	1																																																
M12 plug, straight, one free cable end, 10.0 m	756-3103/0040-0100	1																																																
M12 plug, straight, one free cable end, 20.0 m	756-3103/0040-0200	1																																																
Special lengths on request																																																		
<p><b>Short description:</b></p> <ul style="list-style-type: none"> <li>• PUR, halogen-free</li> <li>• UL / CSA</li> <li>• Drag chain suitability</li> <li>• Free of silicon and CFC</li> <li>• Good resistance to microbes, hydrolysis, oil, ozone and UV radiation. Good chemical resistance.</li> <li>• UL approved</li> </ul>	<p><b>Technical Data</b></p> <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2" style="text-align: left; border-bottom: 1px solid black;">General</th> </tr> </thead> <tbody> <tr><td>Operating voltage</td><td>AC/DC 250 V acc. to IEC 60664-1</td></tr> <tr><td>Operating current</td><td>4 A acc. to IEC 60512-3</td></tr> <tr><td>Rated surge voltage</td><td>2.5 kV acc. to IEC 61076-2-101</td></tr> <tr><td>Insulation resistance</td><td>&gt;10<sup>9</sup> Ω acc. to IEC 60512-2</td></tr> <tr><td>Contact resistance</td><td>≤ 10 mΩ acc. to IEC 61076-2-101</td></tr> <tr><td>Resistance of conductor</td><td>≤ 26 Ω/km</td></tr> <tr><td>Pollution degree</td><td>3/2 acc. to IEC 60664-1</td></tr> <tr><td>Degree of protection</td><td>IP67 acc. to IEC 60529</td></tr> <tr><td>Operating temperature</td><td>-30 °C ... +80 °C (static and moving)</td></tr> <tr><td colspan="2">Drag chain suitability</td></tr> <tr><td>Min. bending radius</td><td>10 x cable Ø</td></tr> <tr><td>Bending cycles</td><td>≥ 4 million</td></tr> <tr><td>Max. acceleration</td><td>10 m/s<sup>2</sup></td></tr> <tr><td>Max. traversing rate</td><td>4 m/s</td></tr> <tr><td>Max. traverse path</td><td>15 m horizontal</td></tr> <tr><td>Torsion</td><td>max. 360°/m</td></tr> <tr><td>Other characteristics</td><td>UV resistant acc. to DIN EN ISO 4892-2B (2006) (1000 h UV continuous light)</td></tr> <tr><td colspan="2" style="border-top: 1px solid black;">Cable</td></tr> <tr><td>Type code</td><td>Lif9YH-11YH 4x0.75 mm<sup>2</sup></td></tr> <tr><td>Note</td><td>Construction acc. to UL + CSA Style 20233</td></tr> <tr><td>Conductor</td><td>Bare copper wire (40 x 0.15 mm)</td></tr> <tr><td>Insulation</td><td>Halogen-free PP9Y Halogen-free polyurethane (PUR) acc. to VDE 0250 part 818, flame resistant acc. To VDE 0472 part 804/B</td></tr> <tr><td>Color</td><td>Gray (~ RAL 7040)</td></tr> </tbody> </table>		General		Operating voltage	AC/DC 250 V acc. to IEC 60664-1	Operating current	4 A acc. to IEC 60512-3	Rated surge voltage	2.5 kV acc. to IEC 61076-2-101	Insulation resistance	>10 <sup>9</sup> Ω acc. to IEC 60512-2	Contact resistance	≤ 10 mΩ acc. to IEC 61076-2-101	Resistance of conductor	≤ 26 Ω/km	Pollution degree	3/2 acc. to IEC 60664-1	Degree of protection	IP67 acc. to IEC 60529	Operating temperature	-30 °C ... +80 °C (static and moving)	Drag chain suitability		Min. bending radius	10 x cable Ø	Bending cycles	≥ 4 million	Max. acceleration	10 m/s <sup>2</sup>	Max. traversing rate	4 m/s	Max. traverse path	15 m horizontal	Torsion	max. 360°/m	Other characteristics	UV resistant acc. to DIN EN ISO 4892-2B (2006) (1000 h UV continuous light)	Cable		Type code	Lif9YH-11YH 4x0.75 mm <sup>2</sup>	Note	Construction acc. to UL + CSA Style 20233	Conductor	Bare copper wire (40 x 0.15 mm)	Insulation	Halogen-free PP9Y Halogen-free polyurethane (PUR) acc. to VDE 0250 part 818, flame resistant acc. To VDE 0472 part 804/B	Color	Gray (~ RAL 7040)
General																																																		
Operating voltage	AC/DC 250 V acc. to IEC 60664-1																																																	
Operating current	4 A acc. to IEC 60512-3																																																	
Rated surge voltage	2.5 kV acc. to IEC 61076-2-101																																																	
Insulation resistance	>10 <sup>9</sup> Ω acc. to IEC 60512-2																																																	
Contact resistance	≤ 10 mΩ acc. to IEC 61076-2-101																																																	
Resistance of conductor	≤ 26 Ω/km																																																	
Pollution degree	3/2 acc. to IEC 60664-1																																																	
Degree of protection	IP67 acc. to IEC 60529																																																	
Operating temperature	-30 °C ... +80 °C (static and moving)																																																	
Drag chain suitability																																																		
Min. bending radius	10 x cable Ø																																																	
Bending cycles	≥ 4 million																																																	
Max. acceleration	10 m/s <sup>2</sup>																																																	
Max. traversing rate	4 m/s																																																	
Max. traverse path	15 m horizontal																																																	
Torsion	max. 360°/m																																																	
Other characteristics	UV resistant acc. to DIN EN ISO 4892-2B (2006) (1000 h UV continuous light)																																																	
Cable																																																		
Type code	Lif9YH-11YH 4x0.75 mm <sup>2</sup>																																																	
Note	Construction acc. to UL + CSA Style 20233																																																	
Conductor	Bare copper wire (40 x 0.15 mm)																																																	
Insulation	Halogen-free PP9Y Halogen-free polyurethane (PUR) acc. to VDE 0250 part 818, flame resistant acc. To VDE 0472 part 804/B																																																	
Color	Gray (~ RAL 7040)																																																	

